


## LOADING HS CODES


1. Open the application.
2. Connect the device Via USB to your computer/laptop.

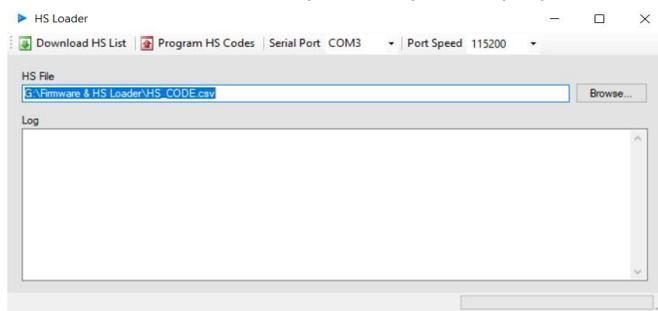


3. Click on download HS list (This is done once to create the HS list).
4. Set the Serial Port COM and the Port Speed (By default the speed is 115200)
5. Click on program. The log will show the HS codes updating.
6. Close the application once done.

## UPDATING FIRMWARE

1. Open the application and ensure the device is connected via USB

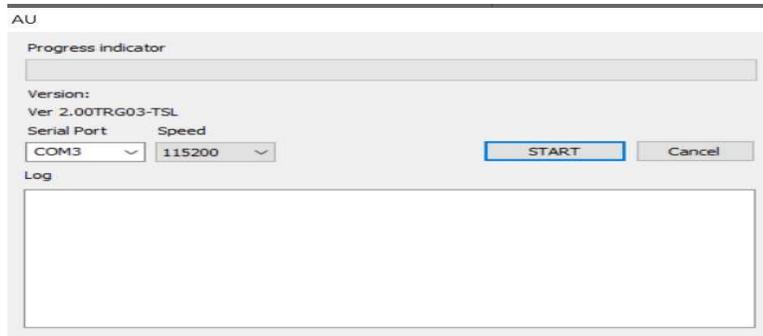

2. Set the Serial Port and Speed.
3. Click on start

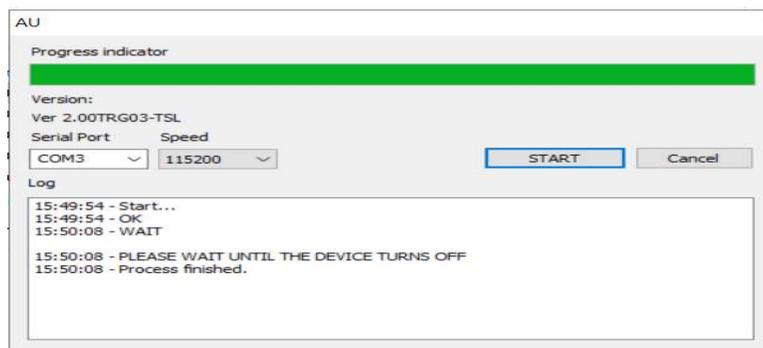

4. The device will update and restart by itself.
5. Once done close the application

## NOTE

For the Type A devices, ensure that all the reports are done before initiating the upgrade for both the firmware and HS CODES